

Santoprene

COMPRESSION SYSTEM (SAN)

Nystrom's Santoprene Compression Seal has many years in the field with long lasting and durable results. The color selections match many exterior building colors. The product ships in a continuous lengths to maximum limits.



FEATURES

COLOR COORDINATION Available in four elastomeric seal color options: beige, white, gray or black.

WATER RESISTANT The system is designed to keep water out and dryness in.

CONTINUOUS LENGTH Product is shipped in maximum lengths to maintain a limited number of field splices.

DETAILS

MATERIAL Santoprene

MOVEMENT

- Thermal: Horizontal and Vertical

MOUNTING Compression

JOINT SIZE 1 inch to 6 inches

LENGTH Continuous

APPLICATION Interior or Exterior

INSTALLATION Wall or Ceiling

OPTIONS Seal Color, Fire Barrier

SEAL COLORS




Beige

White

Gray

Black

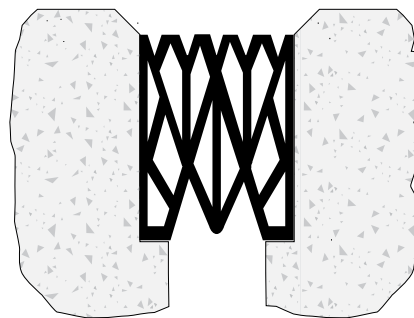

MODELS

MODEL	MINIMUM JOINT OPENING	MAXIMUM JOINT OPENING	SYSTEM DEPTH
SAN-100*	0.5" (13mm)	1.5" (38mm)	N/A
SAN-225	0.6875" (17mm)	1.94" (49mm)	1.88" (48mm)
SAN-250	1.06" (27mm)	2.13" (54mm)	2.38" (60mm)
SAN-300	1.44" (37mm)	2.56" (65mm)	2.53" (64mm)
SAN-400	1.25" (32mm)	3.39" (86mm)	3.19" (81mm)
SAN-500	1.44" (37mm)	4.25" (108mm)	3.63" (92mm)
SAN-600	1.81" (46mm)	5.12" (130mm)	4.63" (118mm)

Lubricant used for installation and assembly. Request part number N2720 for every 75 feet of material.

* 10 foot lengths