


Architectural Seismic System

RENOVATION APPLICATION (SFB)

The Renovation Seismic Expansion Joint System is designed for renovation building projects where an expansion joint is needed to tie new construction to existing construction. The system is bolted into the existing construction and a block out with back fill is necessary for the new construction.

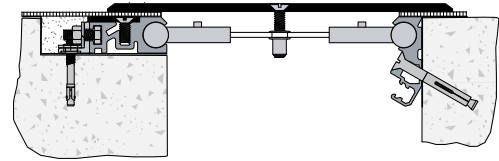

Floor-to-Floor

DETAILS

MOUNTING Block Out & Surface Mount

PRODUCT SPECIFICATIONS Refer to page 14

MODELS


| MODEL | JOINT SIZE AT MEAN T°F | SYSTEM WIDTH | TOTAL MOVEMENT |
|---------|------------------------|---------------|----------------|
| SFB-400 | 4" (102mm) | 6.5" (165mm) | 5" (127mm) |
| SFB-600 | 6" (152mm) | 9.5" (241mm) | 8" (203mm) |
| SFB-800 | 8" (203mm) | 12.5" (318mm) | 11" (279mm) |

| MODEL | JOINT SIZE AT MEAN T°F | SYSTEM WIDTH | TOTAL MOVEMENT |
|----------|------------------------|---------------|----------------|
| SFB-1000 | 10" (254mm) | 15.5" (394mm) | 14" (356mm) |
| SFB-1200 | 12" (305mm) | 18.5" (470mm) | 17" (432mm) |
| SFB-1800 | 18" (457mm) | 27.5" (699mm) | 26" (660mm) |


Architectural Seismic System

CORROSION RESISTANT APPLICATION (SFX/W)

The Stainless Steel Architectural Seismic System is designed to cover expansion control openings in structural, high movement joints, when the specification calls for a stainless steel requirement.

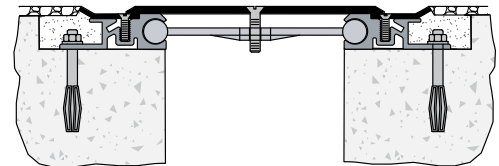

Floor-to-Floor



Floor-to-Wall/Corner

DETAILS

MATERIAL Type 304 Stainless Steel

MOUNTING Block Out

OPTIONS Brass

PRODUCT SPECIFICATIONS Refer to page 14

MODELS

| FLOOR-TO-FLOOR | | | |
|----------------|------------------------|-----------------|----------------|
| MODEL | JOINT SIZE AT MEAN T°F | SYSTEM WIDTH | TOTAL MOVEMENT |
| SFX-200 | 2" (51mm) | 6.25" (159mm) | 2" (51mm) |
| SFX-400 | 4" (102mm) | 10.38" (264mm) | 5" (127mm) |
| SFX-600 | 6" (152mm) | 13.75" (349mm) | 8" (203mm) |
| SFX-800 | 8" (203mm) | 15.75" (400mm) | 11" (279mm) |
| SFX-1000 | 10" (254mm) | 18.75" (476mm) | 14" (356mm) |
| SFX-1200 | 12" (305mm) | 21.75" (552mm) | 17" (432mm) |
| SFX-1800 | 18" (457mm) | 31.75" (806mm) | 26" (660mm) |
| SFX-2400 | 24" (610mm) | 40.75" (1035mm) | 35" (889mm) |

| FLOOR-TO-WALL/CORNER | | | |
|----------------------|------------------------|----------------|----------------|
| MODEL | JOINT SIZE AT MEAN T°F | SYSTEM WIDTH | TOTAL MOVEMENT |
| SFX-200W | 2" (51mm) | 3.88" (99mm) | 1.5" (38mm) |
| SFX-400W | 4" (102mm) | 7.19" (183mm) | 4" (102mm) |
| SFX-600W | 6" (152mm) | 9.88" (251mm) | 6.5" (165mm) |
| SFX-800W | 8" (203mm) | 11.88" (302mm) | 9" (229mm) |
| SFX-1000W | 10" (254mm) | 14.38" (365mm) | 11.5" (292mm) |
| SFX-1200W | 12" (305mm) | 16.88" (429mm) | 14" (356mm) |
| SFX-1800W | 18" (457mm) | 24.88" (632mm) | 21.5" (546mm) |
| SFX-2400W | 24" (610mm) | 35" (889mm) | 29" (737mm) |