

# nystrom<sup>®</sup> Safety Railing


## SMOKE VENT FALL PROTECTION

Nystrom's OSHA compliant Safety Railing is ideal for new and retrofit applications. The safety railing mounts to the existing smoke vent curb counterflash without penetrating the membrane or curb.

### FEATURES

**FALL PROTECTION** In accordance with OSHA regulations, the safety railing is engineered to guard smoke vent openings to protect against falls.

**EASY FIELD INSTALLATION** No field cutting required as rails cut to exact size. Easy assembly fittings and quick mounting on counterflash.

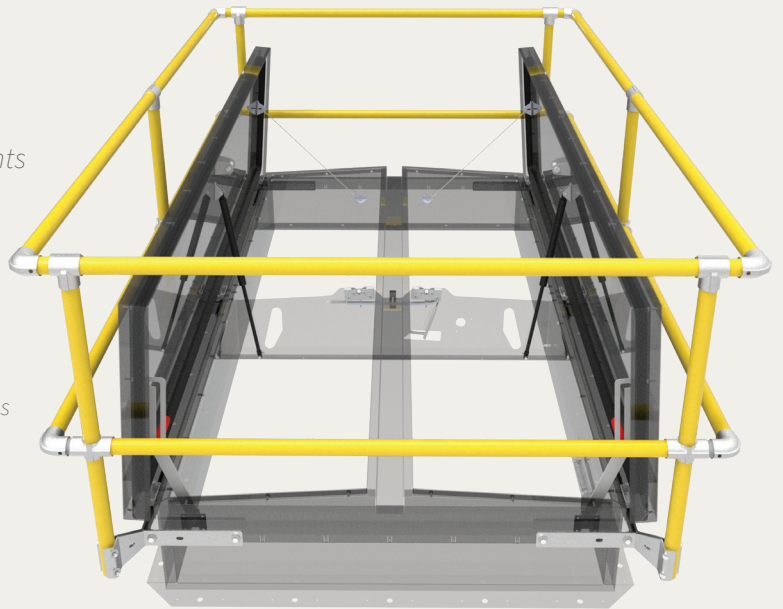

### DETAILS

**MATERIAL** Rails and posts, aluminum, 1-1/4 inch ID (1.66 inch) Schedule 40 pipe


**FINISH** Powder Coat, Safety Yellow

**FITTINGS** Cast aluminum alloy with set screw hold

**MOUNTING BRACKETS** 3/16 inch steel, zinc plated with nut backing plate

**HARDWARE** Hex head bolts 3/8 inch - 16 x 3/4 inch zinc plated steel

**COMPLIANCE** OSHA 29 CFR 1910.29, 1910.28

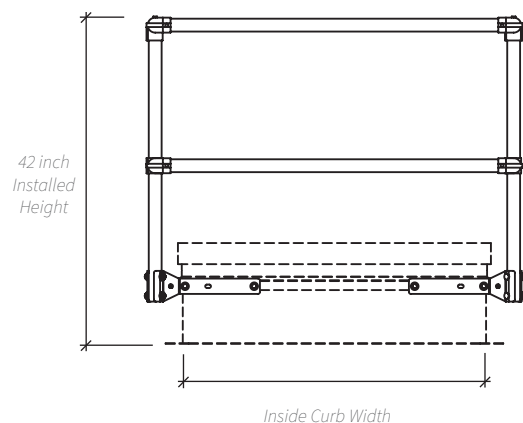

### ORDER GUIDE

4-SIDED	
MODEL	SIZE (IN.)
SRVAY36X30NN	36 x 30
SRVAY36X36NN	36 x 36
SRVAY48X48NN	48 x 48
SRVAY48X96NN	48 x 96
SRVAY60X96NN	60 x 96
SRVAY60X120NN	60 x 120
SRVAY60X144NN	60 x 144
SRVAY72X144NN	72 x 144

2-SIDED	
MODEL	SIZE (IN.)
SRVAY48XNNTN	48
SRVAY60XNNTN	60
SRVAY72XNNTN	72