

#### **ORDER GUIDE**

MODEL	THICKNESS	SIZE		OPTIONS
wcs			-	
	<b>16</b> 16 Gauge	<b>S4X8</b> 4" x 8" Sheet <b>S4X10</b> 4' x 10' Sheet		DHS Drilled Holes & Hardware DHC Countersunk Holes & Hardware
	<b>18</b> 18 Gauge			
	<b>14</b> 14 Gauge			

## Stainless Steel

#### WALL COVERING

Nystrom's Architectural Stainless Steel Wall Covering can be used in a wide variety of applications. This sturdy wall covering is available in various thicknesses and 10 embossed patterns, or a classy satin finish. These metal sheets can be added to walls, doors, and cabinetry in virtually any facility.

#### **DETAILS**

MATERIAL 16 Gauge Type 304 Stainless Steel


FINISH #4 Satin or Embossed

**MOUNTING** Surface

**MOUNTING METHOD** Mechanical

#### SIZE

- 4 feet by 8 feet
- 4 feet by 10 feet

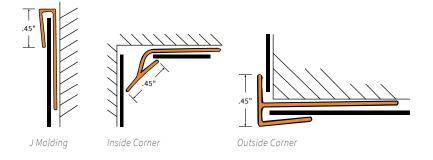

#### **ORDER GUIDE**

MODEL	THICKNESS	SIZE	ACCESSORIES
wcv			-
	028 .028" 040 .040" 060 .060"	Sheet 54X8 4" x 8" Sheet 54X10 4' x 10' Sheet Roll R4X120 4" x 120"	Trim Molding  MJM J-Molding  MIC Inside Corner Molding  MOC Outside Corner Molding  MDB1 Divider Bar028" and .04" thickness only  MDB2 Divider Bar05", .06" and .08" thickness only  CMC Color Match Caulk  HPROLLER Heavy Pressure Roller  Adhesives  ADF1 #M Fastbond Contact Cement (1 Gallon)  ADF5 #M Fastbond Contact Cement (5 Gallon)  ADM1 Super Tek XT-2000 Mastic (1 Gallon)  ADM5 Super Tek XT-2000 Mastic (5 Gallon)  ADM5 Super Tek XT-2000 Mastic (5 Gallon)  ADSL Spray Lock Adhesive (22 oz Can)  Substrate Sealer  DS1 Dry-Seal Substrate Sealer (1 Gallon)  DS55 Dry-Seal Substrate Sealer (5 Gallon)

# Vinyl

### WALL COVERING

Nystrom's Vinyl Wall Covering can be used in a wide variety of applications. This sturdy wall covering is available various thicknesses and 50 color options with a classic pebble grain embossed pattern.

#### **DETAILS**

MATERIAL Vinyl

FINISH Haircell embossed

MOUNTING Surface

**MOUNTING METHOD** Adhesive

- 4 feet by 8 feet
- 4 feet by 10 feet





Vinyl