


PHOTOLUMINESCENT GRIT TAPE

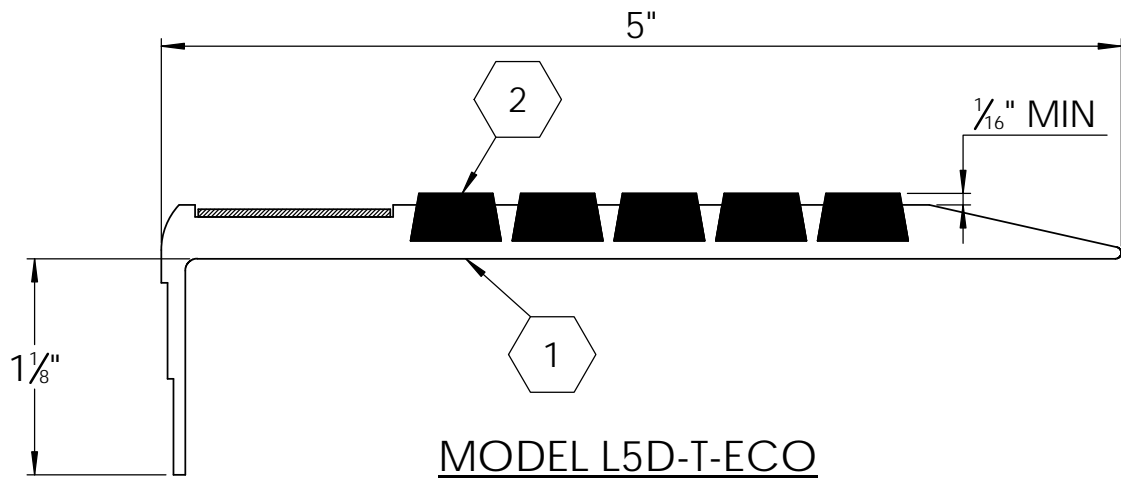

MODEL L5D-T-ECO

(RENOVATION ECO-TREAD RIBS)

SPECIFICATIONS:

- ① **BASE:** EXTRUDED ALUMINUM ALLOY 6063 T-5
- ② **ECOTREAD:** RECYCLED RUBBER SHEET
8MM RECYCLED RUBBER GRANULES
ENCAPSULATED IN A WEAR AND WATER
RESISTANT ELASTOMERIC NETWORK. 2 PARTS
- 3. **BASE FINISH:** MILL
- 4. **POURED CONCRETE STAIRS:** NOSING SHALL
TERMINATE NO MORE THEN 3" FROM END OF
STEPS
- 5. **CONCRETE FILLED STEEL PAN STAIRS:** NOSING
SHALL BE FULL LENGTH OF STEPS, LESS 1/8"
CLEARANCE
- 6. **COLOR:** BLACK (STANDARD), SAFETY YELLOW,
BLACK-BLUE, BLACK-GRAY
- 7. **LENGTH:** 12'0" MAXIMUM
- 8. COUNTER SUNK HOLES PRE-DRILLED FOR A #10
FASTENER SPACED 3" FROM ENDS AND
APPROXIMATELY 12" TO 15" O.C.
- 9. UL 1994 LISTED: COMBINED WIDTH OF PHOTO-
LUMINESCENT MATERIAL SHALL NOT BE LESS
THAN 1"

LENGTH	QTY	COLOR

PROJECT:			
ARCHITECT:			
CONTRACTOR:			
QTY:			
PART#:		STRM-L5D-T-ECO	
 9300 73rd Avenue North Minneapolis, MN 55428		TITLE:	
		Stair Tread, Renovation Alum, Bar Ribbed EcoTread Long Nose, Drilled For Fastener 1" Photoluminescent Grit Insert, EcoTread Ribs	
NAME	DATE	SIZE	DWG. NO.
DRAWN: DKL	3/31/23	A	Nystrom STN STRM-L5D-T-ECO ShpDr
RELEASED: GLN	3/31/23	WEIGHT: 2 LB	REV: A

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.