



Upgrade Your Parking Structures



SUPERIOR EXPANSION JOINTS FOR ULTIMATE PERFORMANCE

NEW!

- Improved movement
- Faster installation
- Factory transitions

Wing Seal

nystrom.com
800-547-2635
info@nystrom.com

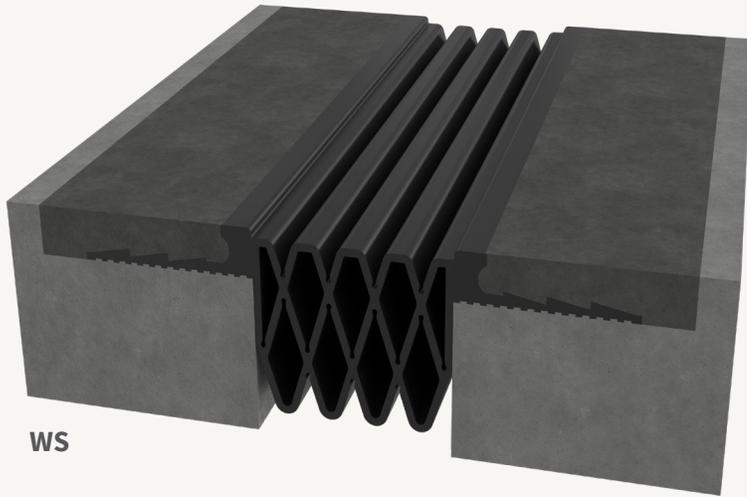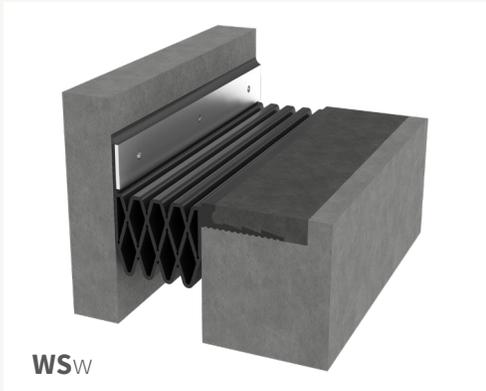

Wing Seal

(WS) EXPANSION JOINT

NEW

BENEFITS

- Improved seal design for better seismic and thermal movement.
- New JointCrete™ Primer allows wet-on-wet application, yielding less downtime.
- New JointCrete Elastomeric Header for rapid return to service and improved longevity.
- Factory transitions available.

DETAILS

MATERIAL Santoprene, 65A Durometer

FINISH Black

MOVEMENT

Thermal: Horizontal and Vertical

Seismic: Lateral Shear

MOUNTING Blockout

JOINT SIZE 2 to 6 Inches

LENGTH Continuous

APPLICATION Exterior

LOAD Vehicular

INSTALLATION Slab or Deck

OPTIONS Fire Barrier

ORDER GUIDE

MODEL	APPLICATION	JOINT SIZE AT MEAN T°F	EXPOSED SIGHT LINE	TOTAL MOVEMENT
EJN-WS-200	Deck to Deck	2" (51mm)	Approx. 2" (51mm)	2.25" (57mm)
EJN-WS-300	Deck to Deck	3" (76mm)	Approx. 3" (76mm)	3" (76mm)
EJN-WS-400	Deck to Deck	4" (102mm)	Approx. 4" (102mm)	4.50" (114mm)
EJN-WS-500	Deck to Corner	5" (127mm)	Approx. 6" (152mm)	5" (127mm)
EJN-WS-600	Deck to Corner	6" (152mm)	Approx. 2" (51mm)	6.5" (165mm)
EJN-WS-200W	Deck to Corner	2" (51mm)	Approx. 3" (76mm)	2.25" (57mm)
EJN-WS-300W	Deck to Corner	3" (76mm)	Approx. 4" (102mm)	3" (76mm)
EJN-WS-400W	Deck to Corner	4" (102mm)	Approx. 6" (152mm)	4.5" (114mm)
EJN-WS-500W	Deck to Corner	5" (127mm)	Approx. 6" (152mm)	5" (127mm)
EJN-WS-600W	Deck to Corner	6" (152mm)	Approx. 6" (152mm)	6.5" (165mm)

Additional options available, email info@nystrom.com for more information.

Learn More!

800-547-2635
info@nystrom.com