

8 7 6 5 4

3		_			'		
ITEM NO.	ITEM NO. PART NUMBER 10 27496-10.00-Y 20 27496-18.00-Y 30 27496-48.50-Y 500 27180-A-Y 510 27185 515 27188 520 27186 525 27231		DESCRIPTION RAIL, 1-1/4" X 10.00L, RAIL, 1-1/4" X 18.00L, RAIL, 1-1/4" X 48.50L, PKG, CORNER POST, ZPS,			QUANTITY	
10						2	
20						1	
30						4	
500						4	
510			FTG, ELBOW, FTG, TEE, FTG, CROSS ELBOW, FTG, DBL TEE,		5		
515					3		
520					1		
525					1		
575	SRCAY	/-GATE-30		GAT	E, 30,		1

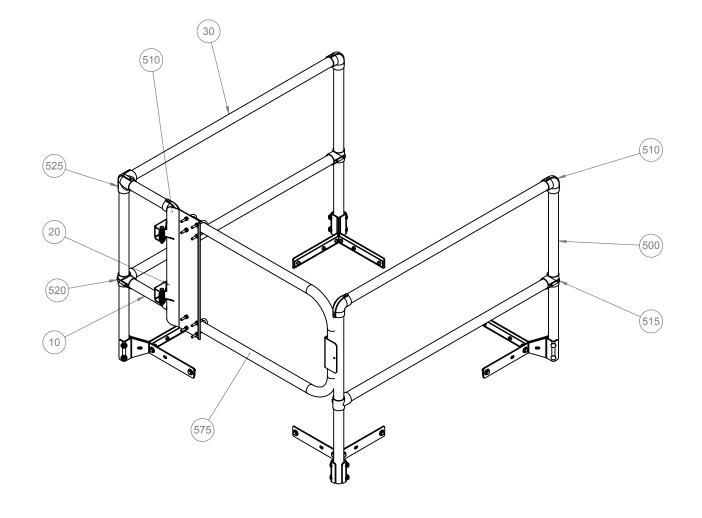

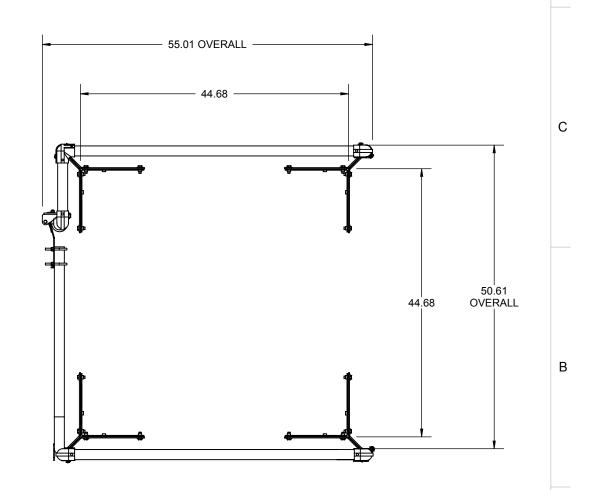

SPECIFICATIONS

RAILS, POSTS: 6061 T6 ALUMINUM ALLOY 1 1/4" I.D. SCH 40

GATE: 1 14" TUBULAR ALUMINUM SELF CLOSING WITH COIL SPRING, ZINC PLATED

COUNTERFLASH MOUNTING BRACKETS: 3/16" ZINC PLATED STEEL FASTENED TO STEEL BACKING PLATE

BOLTS: HEX HEAD BOLTS 3/8"-16 x 3/4" GRADE 5 ZINC PLATED

RAILING FITTINGS AND PLUGS: MANUFACTURER'S STANDARD CAST WITH SET SCREW HOLD

FITS HATCH SIZES UP TO 36" X 36"

CERTIFICATIONS: MEETS OSHA 29 CFR 1910.23 GUARDING FOR OPENINGS REQUIREMENTS; SUPPORTS 200 LBS. FORCE

FINISH: SAFETY YELLOW POWDER COAT PAINT

SRBAY36X36FG

Safety Railings for Roof Hatch
36X36, Front Exit, Therm-Brokn
Aluminum, Safety Yellow Pwd, Gate, 3" Curb,

NAME DATE

DRAWN SJB TODAY
RELEASED DWO 7/22/2020

RELEASED DWO 7/22/2020

TITLE:

Safety Railings for Roof Hatch
36X36, Front Exit, Therm-Brokn
Aluminum, Safety Yellow Pwd, Gate, 3" Curb,

REV

SRBAY36X36FG
WEIGHT: Weight SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED. ©2020 NYSTROM, INC.

8 7 6 5 4 3 2