



# Wing Infill

## FLOORING SYSTEM (SA/DA)

Nystrom's Single Wing and Double Wing Flooring Infill System is designed to cover thermal expansion joint openings. Constructed of aluminum and designed to integrate with carpet, tile and VCT flooring, this system provides a minimal 1-1/2 inch sight line.

### FEATURES

**COORDINATE WITH FLOORING** Seamless integration with existing VCT, carpet and tile flooring.

**DOUBLE WING OPTION** Add a double sight line to coordinate with a matching wall system.

**ADA COMPLIANT** This system is not a trip hazard as the no bump design provides a finished flush floor transition.

### DETAILS

**MATERIAL** 6063-T6 Aluminum

**FINISH** Mill

**MOVEMENT**

- Thermal: Horizontal

**MOUNTING** Surface


**JOINT SIZE** Up to 2 inches

**LENGTH** 10 Linear Feet


**LOAD** Pedestrian and Light Cart

**INSTALLATION** Floor

**OPTIONS** Moisture Barrier, Fire Barrier

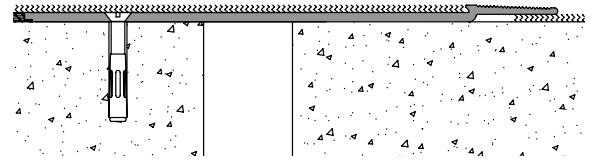

Single Wing Floor-to-Floor

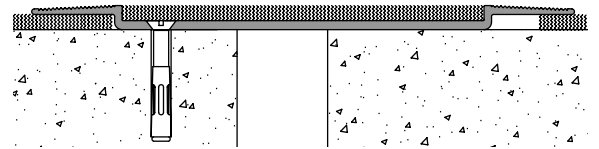

Double Wing Floor-to-Floor

### MODELS

#### SINGLE WING

MODEL	JOINT SIZE AT MEAN T°F	EXPOSED SIGHT-LINE	FLOOR INFILL HEIGHT	TOTAL MOVEMENT
SA150-125	2" (51mm)	1.5" (38mm)	0.125" (3mm)	1" (25mm)
SA150-250	2" (51mm)	1.5" (38mm)	0.25" (6mm)	1" (25mm)
SA150-375	2" (51mm)	1.5" (38mm)	0.375" (10mm)	1" (25mm)

#### DOUBLE WING

MODEL	JOINT SIZE AT MEAN T°F	EXPOSED SIGHT-LINE	FLOOR INFILL HEIGHT	TOTAL MOVEMENT
DA150-125	2" (51mm)	4" (102mm)	0.125" (3mm)	1" (25mm)
DA150-250	2" (51mm)	4" (102mm)	0.25" (6mm)	1" (25mm)
DA150-375	2" (51mm)	4" (102mm)	0.375" (10mm)	1" (25mm)