

Security

ROOF HATCH

Designed for applications with heightened security, Nystrom's Security Roof Hatch is constructed of heavy-duty materials and the option for security grade locks. Ideal for prisons, banks, water treatment facilities and other high security buildings.

FEATURES

SECURITY GRADE MATERIAL Deter forced entry with extra heavy-duty top security grade roof hatches. Constructed of 3/16 inch steel or 1/4 inch aluminum.

OPTIONAL LOCKS Add essential security upgrades to your rooftop access with detention or mortise locks.

OPTIONAL VIEWPORT Gain visibility with the optional bulletproof viewport on roof hatch cover. Ideal for use in prisons and wastewater treatment facilities.



DETAILS

MATERIAL

- Aluminum: 1/4 inch, mill finish
- Steel: 3/16 inch, ANSI 70 Gray powder coat

COVER Formed metal cover with liner, stiffened to withstand a live load of 40psf with a max deflection of 1/150 the span

CURB Single wall curb with EZ tab counterflash and mounting flange

INSULATION 1 inch polystyrene in cover, 1 inch polyiso around curb

GASKET Extruded EPDM adhesive backed gasket seal, continuous around cover

SPRING/HINGE ASSEMBLY Zinc plated steel tamper-proof hinges contained within spring assembly, includes steel compression springs

HOLD OPEN ARM Zinc plated steel automatic hold open arm with red vinyl grip handle locks cover in open position

LATCH Zinc plated steel latch with exterior and interior turn handles and padlock hasp


FINISHES



Mill
Aluminum



ANSI 70 Gray
Powder Coat

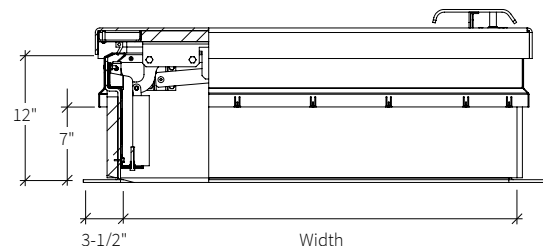

STANDARD MODELS

GALVANIZED STEEL	ALUMINUM	STEEL + ALUMINUM	SIZE (IN.)	ACCESS	DOOR	CURB
RHSG36X30S1T	RHSA36X30S1T	RHSB36X30S1T	36 x 30	Ladder	Single	Single Wall
RHSG36X36S1T	RHSA36X36S1T	RHSB36X36S1T	36 x 36	Ladder	Single	Single Wall
RHSG30X54S1T	RHSA30X54S1T	RHSB30X54S1T	30 x 54	Ship Stair	Single	Single Wall

Additional sizes and options available, call for more information.

Download Drawings, CAD, Spec, and LEED documents at www.Nystrom.com