


### MODEL A1.875D


(SINGLE STAGE RIBBED ABRASIVE BARS)

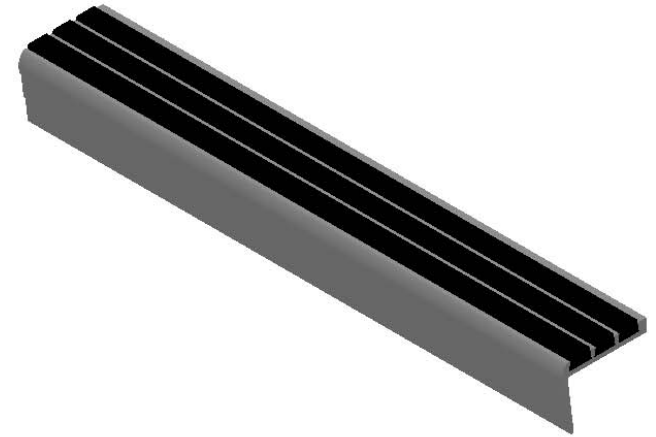

#### SPECIFICATIONS:

- ① **BASE:** EXTRUDED ALUMINUM ALLOY 6063 T-5
- ② **ABRASIVE:** ALUMINUM OXIDE SILICON CARBIDE GRANULES IN A UV PROTECTED, 2 PART EPOXY, LOCKED INTO EXTRUDED CHANNELS
- 3. **BASE FINISH:** MILL
- 4. **POURED CONCRETE STAIRS:** NOSING SHALL TERMINATE NO MORE THEN 3" FROM END OF STEPS
- 5. **CONCRETE FILLED STEEL PAN STAIRS:** NOSING SHALL BE FULL LENGTH OF STEPS, LESS 1/8" CLEARANCE
- 6. **COLOR:** BLACK (STANDARD), SAFETY YELLOW, GRAY, RED, BROWN, GREEN, BURGUNDY, BLUE, BUFF, LUMINESCENT
- 7. **LENGTH:** 12'0" MAXIMUM (STANDARD)
- 8. **COUNTER SUNK HOLES PRE-DRILLED FOR A #10 FASTENER** SPACED 3" FROM ENDS AND APPROXIMATELY 12" TO 15" O.C.
- 9. **UL 1994 LISTED:** COMBINED WIDTH OF PHOTO-LUMINESCENT MATERIAL SHALL NOT BE LESS THAN 1"

LENGTH	QTY	COLOR

PROJECT:				
ARCHITECT:				
CONTRACTOR:				
QTY:				
PART#:		STSB-A1.875D		
 9300 73rd Avenue North Minneapolis, MN 55428		TITLE:		
		V830, Stair Tread, Bar Ribbed Abrasive, Long Nose Angled, Drilled For Bolt In,		
NAME	DATE	SIZE	DWG. NO.	REV
DRAWN: BMH	3/11/11	A	Nystrom STN STSB-A1.875D ShpDr	A
RELEASED: PE	3/11/11	WEIGHT: .9 LB	SHEET 1 OF 1	

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.