
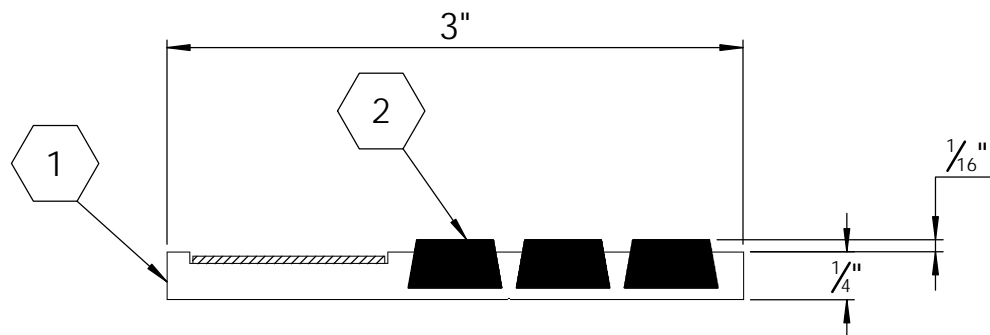


B

B

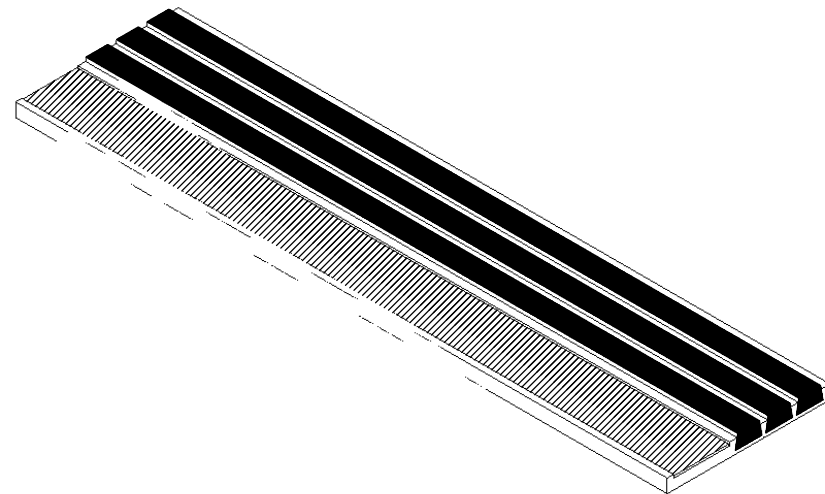


MODEL N3D-T-ECO

SPECIFICATIONS:

- 1. **BASE:** EXTRUDED ALUMINUM ALLOY 6063 T-6
- 2. **ECOTREAD:** RECYCLED RUBBER SHEET
8MM RECYCLED RUBBER GRANULES ENCAPSULATED IN A WEAR AND WATER RESISTANT ELASTOMERIC NETWORK. 2 PART EPOXY, LOCKED INTO EXTRUDED CHANNELS
- 3. **BASE FINISH:** MILL
- 4. **POURED CONCRETE STAIRS:** NOSING SHALL TERMINATE NO MORE THEN 3" FROM END OF STEPS
- 5. **CONCRETE FILLED STEEL PAN STAIRS:** NOSING SHALL BE FULL LENGTH OF STEPS, LESS 1/8" CLEARANCE

- 6. **COLOR:** BLACK (STANDARD), SAFETY YELLOW, BLACK-BLUE, BLACK-GRAY
- 7. **LENGTH:** 12'0" MAXIMUM
- 8. **UL 1994 LISTED:** COMBINED WIDTH OF PHOTO-LUMINESCENT MATERIAL SHALL NOT BE LESS THAN 1"

LENGTH	QTY	COLOR

PROJECT:			
ARCHITECT:			
CONTRACTOR:			
QTY:			
PART#:		STSM-N3D-T-ECO	
 9300 73rd Avenue North Minneapolis, MN 55428		TITLE: Stair Tread, Single Stage, 3 Eco-tread Ribs, No Nose, Drilled for Bolt-In, 1" Photoluminescent Grit Strip	
NAME	DATE	SIZE	DWG. NO.
DKL	7/3/23	A	Nystrom STSM-N3D-T-ECO ShpDr
RELEASED	GLN	7/3/23	WEIGHT: 1.27 LB
			REV A
			SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NYSTROM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NYSTROM IS PROHIBITED.